

1064nm Optical Fiber Mirror

Features

Low Insertion Loss
High Return Loss
High Reliability & Stability

Applications

Fiber Optics Lasers
Fiber Sensors
Coherent Detecting


Specifications

Parameters	Unit	Values
Center Wavelength	nm	1064
Operating Wavelength Range	nm	±10
Typ. Insertion Loss	dB	0.4
Max. Insertion Loss	dB	0.6
Max. PDL	dB	0.05
Max. Optical Power (CW)	mW	300
Max. Tensile Load	N	5
Fiber Type		HI 1060 Fiber
Operating Temperature	°C	-5 to +70
Storage Temperature	°C	-40 to +85

*Above specifications are for device without connector.

*For devices with connectors, IL will be 0.3dB higher.

Package Dimensions

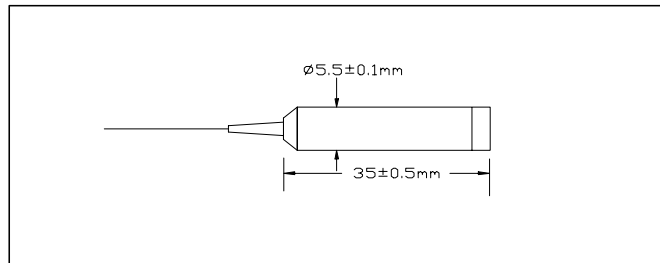

Ordering Information

AOFM- ①①-②-③-④

①①: Wavelength

06 - 1064nm

SS - Specify

②: Connector Type

1 - FC/UPC

2 - FC/APC

3 - SC/UPC

4 - SC/APC

N - None

S - Specify

③: Fiber Jacket

B - 250um Panda Fiber

L - 900um Loose Tube Panda Fiber

S - Specify

④: Fibre Length

1 - 1m

S - Specify