

Features

Wide Pass Band
Low Insertion Loss
High Return Loss
Excellent Environmental Stability
High Power Handling Capability

Applications

Fiber Lasers
Fiber Amplifiers
Fiber Sensors
Research

Specifications


Parameters	Unit	Values	
Pass Band	Wavelength Range	nm	960~990 (1020~1080)
	Max. Insertion Loss	dB	0.9
	Typ. Insertion Loss	dB	0.7
	Min. Isolation	dB	25
	Typ. Isolation	dB	30
Reflection Band	Wavelength Range	nm	1020~1080 (960~990)
	Max. Insertion Loss	dB	0.7
	Typ. Insertion Loss	dB	0.5
	Min. Isolation	dB	12
	Typ. Isolation	dB	15
Min. Return Loss	dB	50	
Min. Extinction Ratio	dB	20	
Typ. Extinction Ratio	dB	22	
Min. Directivity (over Reflection Band)	dB	55	
Thermal Stability	dB/°C	≤0.005	
Max. Optical Power (CW)	W	1, 2, 3 or Specify	
Max. Tensile Load	N	5	
Fiber Type		PM 980 Panda Fiber	
Operating Temperature	°C	-5 to +70	
Storage Temperature	°C	-40 to +85	

*Above specifications are for device without connector.

*For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower , ER will be 2dB lower and optical power is only 1000mW.

*The PM fiber and the connector key are aligned to the slow axis.

Package Dimensions

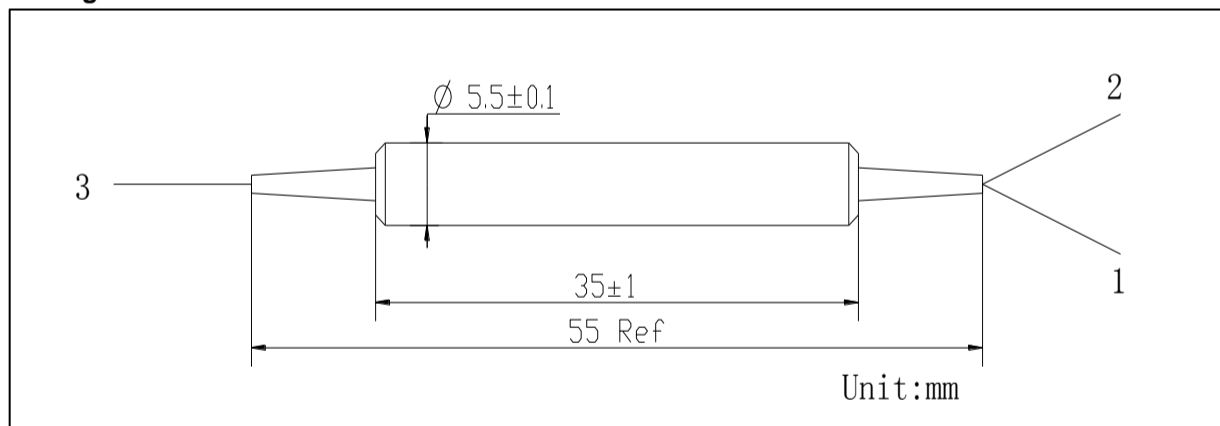

Ordering Information

AHPMFWDM-①①①①-②②-③③③-④④④-⑤

①①①①: Wavelength

9806 - 980nm Pass / 1064nm Reflect

0698 - 1064nm Pass / 980nm Reflect

②②: Handling Power

01 - 1W

SS - Specify

③③③: Connector Type on Port 1, 2 & 3

1 - FC/UPC

2 - FC/APC

3 - SC/UPC

4 - SC/APC

N - None

S - Specify

④④④: Fiber Jacket on Port 1, 2 & 3

B - 250um Fiber

L - 900um Loose Tube

S - Specify

⑤: Fiber Length

0.8 - 0.8m

S - Specify