

Features

High Handling Power
 Low Insertion
 High Return Loss


Applications

Fiber Optics Components

Specifications

Parameters	Unit	Values
Center Wavelength	nm	1064
Operating Wavelength Range	nm	±20
Nominal Beam Diameter	mm	0.4 、 0.5 、 0.9 or Specify
Working Distance	mm	50 or Specify
Typ. Insertion Loss at 50mm	dB	0.2~0.4
Max. Insertion Loss at 50mm	dB	0.5
Min. Return Loss	dB	50
Max. PDL	dB	0.02
Max. Optical Power (CW)	W	3、 5、 10、 20、 30 or Specify
Max. Tensile Load	N	5
Operating Temperature	°C	-5 to +70
Storage Temperature	°C	-40 to +85

Package Dimensions

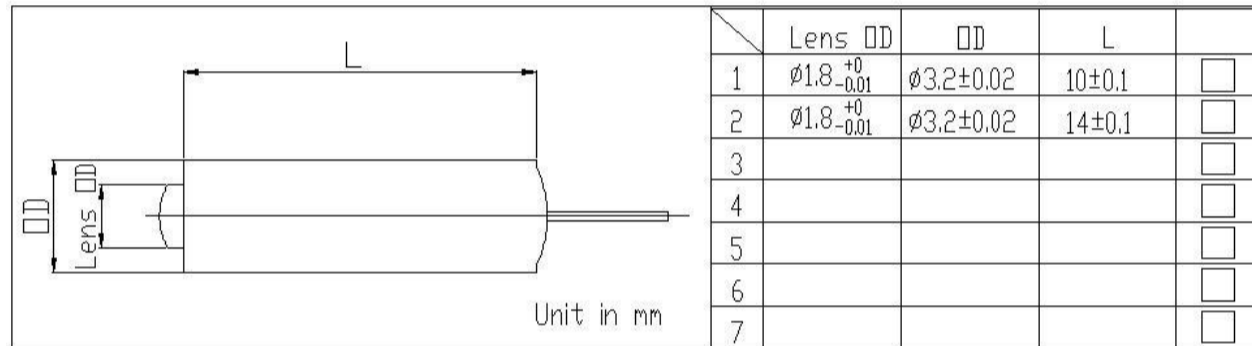

Ordering Information

AHC-①①-②②-③③-④-⑤⑤-⑥-⑦-⑧

①①: Wavelength

06 - 1064nm
 SS - Specify

②②: Beam Diameter

04 - 0.4mm
 05 - 0.5mm
 09 - 0.9mm
 SS - Specify

③③: Working Distance

50 - 50mm
 SS - Specify

④: Fiber Jacket

L - 900um Loose Tube
 C - 3mm Loose Cable
 A - 3mm Armoured Cable
 B - 6mm Armoured Cable
 S - Specify

⑤⑤: Handling Power

03 - 3W
 05 - 5W
 10 - 10W
 20 - 20W
 30 - 30W
 SS - Specify

⑥: Fiber Type

1 - HI 1060 Fiber

⑦: Fiber Length

1.5 - 1.5m
 S - Specify

⑧: Package Type

1 - Dia 3.2*10
 2 - Dia 3.2*14