

Features

- All Fiber Construction
- High Power Handling Capability
- Outstanding Optical Performance
- Cost Effective
- High Reliability

Applications

- Fiber Optical Test Equipment
- Fiber Sensor
- Fiber Lasers
- Optical Fiber Amplifier
- R&D
- Radar

Specifications



Parameters	Unit	Values	
Pass Band	Wavelength Range	nm	1950-2050
	Max. Insertion Loss	dB	1.0
	Typ. Insertion Loss	dB	0.8
	Min. Isolation	dB	25
	Typ. Isolation	dB	30
Reflection Band	Wavelength Range	nm	1550-1590
	Max. Insertion Loss	dB	0.8
	Typ. Insertion Loss	dB	0.6
	Min. Isolation	dB	12
	Typ. Isolation	dB	15
Min. Return Loss	dB	50	
Min. Directivity(over 1550~1590nm)	dB	55	
Min. Extinction Ratio	dB	18	
Typ. Extinction Ratio	dB	20	
Thermal Stability	dB/°C	≤0.005	
Max. Optical Power (CW)	W	1, 3, 5 or Specify	
Max. Tensile Load	N	5	
Fiber Type		PM 1550 Fiber, PM 1950 Fiber or Specify	
Operating Temperature	°C	-5 to +70	
Storage Temperature	°C	-40 to +85	

*Above specifications are for device without connector.

*For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, ER will be 2dB lower, optical power is only 1W.

*The PM fiber and the connector key are aligned to the slow axis.

Package Dimensions

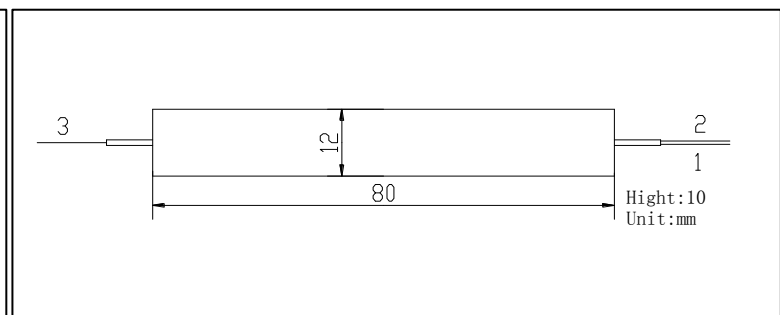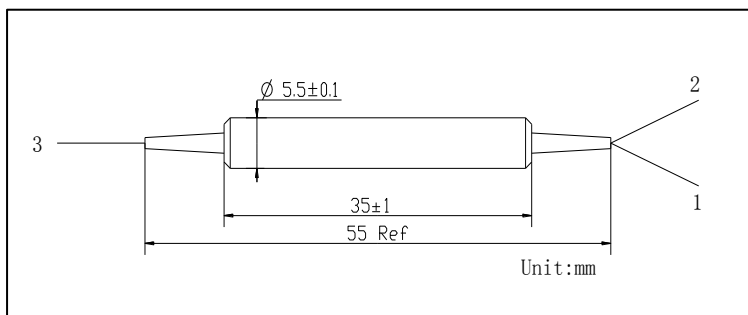

Ordering Information

AHPMFWDM-①①①①-②-③③-④④④-⑤⑤⑤-⑥

①①①①: Wavelength
2057 - 2000nm Pass / 1570nm Reflect

②: Fiber Type
1 - PM 1550 Fiber (all ports)
2 - PM 1550 Fiber at Common & Reflect ports
and PM 1950 Fiber at Pass port
S - Specify

③③: Handling Power
01 - 1W
SS - Specify

④④④: Connector Type on Port 1, 2 & 3
1 - FC/UPC
2 - FC/APC
3 - SC/UPC
4 - SC/APC
N - None
S - Specify

⑤⑤⑤: Fiber Jacket on Port 1, 2 & 3
B - 250um Bare Fiber
L - 900um Loose Tube
S - Specify

⑥: Fiber Length
0.8 - 0.8m
S - Specify