

Polarization Maintaining Fiber Patchcord

Features

High Isolation
 Low Insertion Loss
 Large Aperture Features

Applications


Fiber Optic Lasers
 Optical Transmitters & Transceivers
 Fiber Instruments
 Fiber I/O Ports

Specifications

Parameters	Unit	Values	
Connector type		FC/UPC, SC/UPC,	FC/APC, SC/APC
Center Wavelength	nm	980*, 1064*, 1310, 1480 or 1550	
Key Orientation		Slow Axis	
Axis Alignment	deg	± 3	
Typ. Insertion Loss	dB	0.3	0.4
Max. Insertion Loss	dB	0.5	
Min. Return Loss	dB	50	60
Min. Extinction Ratio	dB	23	
Max. Optical Power (CW)	mW	300	
Max. Tensile Load	N	5	
Fiber Type		PM Panda Fiber	
Fiber Length Tolerance	%	± 10	
Operating Temperature	°C	-5 to +70	
Storage Temperature	°C	-40 to +85	

* IL is 0.1dB higher for short wavelength, including 980nm & 1064nm.

Package Dimensions

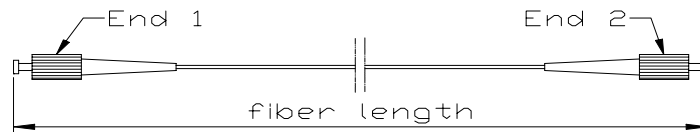

Ordering Information

APMP-①①-②-③③-④-⑤

①①: Wavelength

55 - 1550nm
 48 - 1480nm
 31 - 1310nm
 06 - 1060nm
 98 - 980nm
 S - Specify

③③: Connector Type on End 1 & 2

1 - FC/UPC
 2 - FC/APC
 3 - SC/UPC
 4 - SC/APC
 N - None
 S - Specify

④: Fiber Jacket

B - 0.9mm Buffer
 L - 900um Loose Tube
 C - 3mm Cable
 S - Specify

②: Key Width (for FC Connector)

R - 2.02mm

⑤: Fiber Length

1 - 1.0m
 S - Specify